

ENGINEERING DEPARTMENT
UNIVERSITY OF DELHI
DELHI-110007
NOTICE INVITING QUOTATIONS

Ref. No. UE/ 142

/DU/EM-54(2016-2017)

Dated 2/8/16

Sealed item rate quotation are here by invited two envelop system one for eligibility and second for financial for the contractors enlisted with, C.P.W.D , MES, Railways & working contractors of Delhi University for "- -Supplying and fixing MCCB and cable in A-1, A-2, A-3 and A-4 at 29/31 Probyn road for new electric connection from TPDDL, University of Delhi..So as to the reach the office of the undersigned upto 3.00 P.M. on...4/8/16.....

S. No	Description of Items	Qty	Unit	Rate	Amount
1	P/F installation,testing and commissioing of 100 amps MCCB (35 KA) LM capacity 3 pole 415 volts AC supply complete with connection reqd. at site (GE)	3	nos		
2	Supplying and fixing of suitable size Enclosure for 100 amp MCCB wall mountain etc as reqd. at site	3	nos		
a	Supplying/fixing of one number PVC insulated and PVC sheathed /XLPE power cable of 1.1 KV grade of following size direct in ground including excavation, sand cushioning , protective covering ,refilling the trench etc as reqd.				
a	3½ X 25 sqmm	15	mtr		
4	Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed/XLPE aluminium conductor cable of 1.1KV grade				
4	3½ X 25 sqmm	7	nos		
5	S/D the following size FRLS of PVC insulated copper conductor cable in the existing surface /recess PVC conduit as reqd.				
a	4 x 16	10	mtr		
6	Constructing masonry Chamber 60x45x50 cm inside, in brick work in cement mortar 1:4 (1 cement : 4 coarse sand) & C.I. double flap surface box 400x200x200 mm (inside) with locking arrangement and RCC top slab 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size) , i/c necessary excavation, foundation concrete 1:5:10 (1 cement : 5 fine sand:10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement : 3 coarse sand) 12 mm thick, finished with a floating coat of neat cement complete as per standard design	2	nos		
7	S/F/ testing & commissioning of prewired fluorescent fitting single box type fitting (1x40watts) complete with all accessories and tube etc. directly on ceiling or wall i/c connection with 1.5sqmm FR PVC copper cond. cable etc. as reqd. (TMC 501/136) (Philips make) (A-4)	4	Nos		
8	S/F Wall Fan complete with all accessories i/c connection and testing the same etc.as reqd.(Orient/Crompton)	3	nos		
9	Fixing of one number PVC insulated and PVC sheathed /XLPE power cable of 1.1 KV grade of following size on wall surface as reqd.	50	mtr		

Total

Condition

- The work should be completed in 3 days.
- Rates should be quoted both in words & figures.
- CPWD specifications will be followed.
- Undersigned reserves the authority to reject any or all the quotation without assigning any reason therefore
- Contractor shall enclose copies of labour registration , ESIC, EPFO along with their bid otherwise their quotation will not be accepted

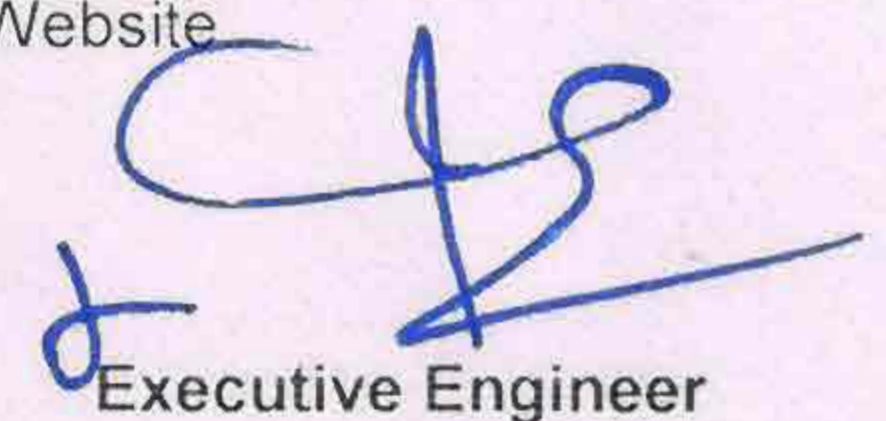
Executive Engineer

I/we hereby undertake that my/our agency have not been black listed/debarred in any Govt. organization since last 3 years.

(Contractor)

Copy to:

- The director, Computer Center with a request to display the notice inviting quotation on the Delhi University Website
- Sh.S.M Goel J.E (E)
- Mrs. Kavita JACT to ensure the display of the quotation notice on University website.
- Notice Board


Executive Engineer