


DESHBANDHU COLLEGE

NAME OF WORK	SEALED QUOTATIONS ARE INVITED FOR RENNOVATION OF BOYS COMMON ROOM AT DESHBANDHU COLLEGE ON OR BEFORE 11TH DECEMBER 2015 UPTO 1:00 PM IN THE PRINCIPAL'S OFFICE				
S. No	Description	Unit	Quantity	Rate (Rs)	Amount (Rs)
1	Demolition of brick work of stage 8.75X3.00 mtr and depth 150mm and making good in proper finish	Each	1		
2	Material and labour for bedding layer of chemical adhesive/Badarpur of minimum 6mm thick after roughing of floor surface by picking, sweeping, cleaning and washing down with water and removal of dust etc. for laying floor tiles of any size/type complete	Sm	185		
3	Material and labour exposed GI frame/grid system duly powder coated for module size of 600X600mm suitable for laying in mineral fibre ceiling tiles having main T runner of 15mm size suspended at 1200mm C/C and cross T runner of 15mm size suspended at 600mm C/C with interlocking arrangement to form grid of size 600X600mm parameter runner channel of 15mm size main and cross T runner supported by GI wire of suitable size complete in all respect. Make ARMSTRONG/HUNTERDUGLAS/GYPROC/SANT GOBAIN	Sm	185		
4	Material and labour of self interlocking type false ceiling mineral fibre board of size 600X600mm minimum 12mm thick having tegular edge profile suitable for false ceiling grid frame model size 600X600mm complete. Make ARMSTRONG/HUNTERDUGLAS/GYPROC/SANT GOBAIN	Sm	185		
5	Taking down existing ventilator and material and labour aluminum powder coated ventilator of suitable size with glass and provision of fitting of air condition including repair of jams etc.	Sm	5		
6	Material and labour of powder coated aluminum grill	Sm	4		
7	Taking down cement plaster and removing of malwa from college facility	Sm	160		
8	Material and labour my steel work as in grill of ventilator of suitable size of angle	Kg	300		
9	Material and labour for 15mm thick rendering on fair phase of brick/concrete surface in cement mortar 1:4 and finished and even and smooth without using extra cement complete	Sm	160		
10	Material and labour on walls surface and providing a layer of 2-3 mm thick wall putty on plaster surface of wall/ceiling and preparation to receive distemper etc. complete Make JK WALL PUTTY/BIRLA WHITE PUTTY	Sm	160		
11	All as per item number 11 but in old surface	Sm	50		
12	Material and labour for applying 2 coats of plastic emulsion paint with roller on wall surface and preparation to receive paint etc. Make BERGER/ASIAN/NEROLAC	Sm	160		
13	All as per item number 13 but in old surface	Sm	160		
14	Material and labour of preparation of old/new painted surface of wood/steel based material including 2 coats of synthetic enamel paint complete Make BERGER/ASIAN/NEROLAC	Sm	60		
15	Material and labour aluminum powder coated partition of suitable size with glass/board complete with all fittings	Sm	12		

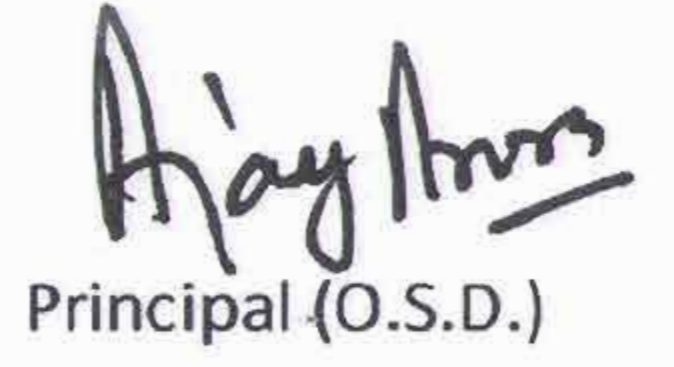

 Office: Special Duty
 (Principal)
 Deshbandhu College
 Kalkaji, New Delhi-19

16	Material and labour aluminum powder coated door of suitable size with glass/board complete with all fittings	Sm	4.2		
17	Provision of 100mm PVC pipe spout for rain water	Each	2		
18	Making opening of size 2.10 Sm from entry for stage including necessary brick work/jems complete	Each	1		
19	Material and labour of researched mounted LED light fitting of 2'X2' size suitable for false ceiling 36 watt white light metal body with white colour outer finish and acrylic diffuser including LED driver/transformer, spring loaded clips for easy mounting and making all electric connections complete Make PHILLIPS/BAJAJ/HAVELS/WIPRO/HALONIX/C C	Each	21		
Total					

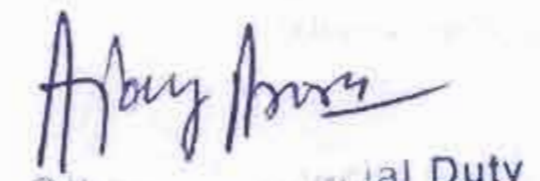
**Note : Rates for the work as detailed should be quoted in the format as specified above.
Rates for all make/brand as mentioned above should be quoted seperately.**



Convener, Building and Furniture Maintainance Committee



Principal (O.S.D.)



Office: Special Duty
(Principal)
Deshbandhu College
Kalkaji, New Delhi-19